



WELDED STEEL CHAIN

COTTERED STYLE

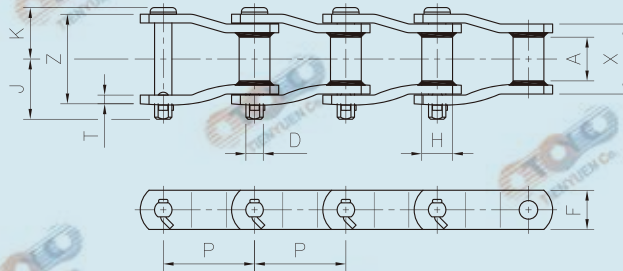

RIVETED STYLE

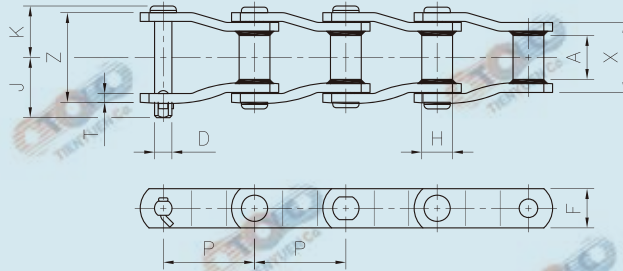

Nomenclature :

WR : chain with heat-treated pins

WH : chain with all parts heat-treated

WHD : chain with larger pin , thicker and taller sidebar than regular series

Chain No.	Pitch		Pin			Sidebar		Barrel	Link			Avg. Ulti. Tensile Strength		Approx. Weight kg / m
	P		D	J	K	T	F	H	Z	X	A	WH	WR	
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kgf	
WH188	2.609	66.27	12.70	38.97	32.62	6.35	28.45	22.22	55.63	41.15	22.35	13,650	—	5.66
W78	2.609	66.27	12.70	43.69	37.34	6.35	28.45	22.35	65.07	51.00	28.40	17,500	11,500	6.06
W78M	2.609	66.27	12.70	43.69	37.34	6.35	31.75	22.35	65.07	51.00	28.40	18,000	13,900	7.24
W82	3.075	78.10	14.29	43.18	40.39	6.35	31.75	26.97	71.37	57.40	31.80	19,500	12,800	7.33
WHD82	3.075	78.10	19.05	47.75	44.45	9.50	38.10	31.75	78.49	57.91	31.80	27,250	—	11.92
W124	4.000	101.60	19.05	58.21	52.03	9.50	38.10	31.75	91.29	71.60	38.10	32,000	21,000	11.44
WH111	4.760	120.90	19.05	64.84	59.10	9.50	44.45	31.75	105.50	85.80	57.20	41,500	—	14.15
WH106	6.000	152.40	19.05	58.21	52.03	9.50	38.10	31.75	91.29	71.60	41.20	31,500	—	10.43
WHD106	6.050	152.40	25.40	61.95	58.70	12.70	50.80	41.20	102.40	76.50	41.20	52,250	—	17.58
WH110	6.000	152.40	19.05	62.65	54.70	9.50	38.10	31.75	96.65	76.50	46.70	31,500	—	10.73
W132	6.050	153.67	25.40	78.35	76.35	12.70	50.80	44.45	137.70	111.80	69.85	55,500	38,000	20.85
WH150	6.050	153.67	25.40	78.35	76.35	12.70	63.50	44.45	137.70	111.80	69.85	55,500	—	25.03

1. Dimension A is inside width for sprocket contact
2. Attachments are available upon request
3. Induction hardened pins available
4. Stainless steel chains are available upon request