



ANSI COMBINATION CHAIN

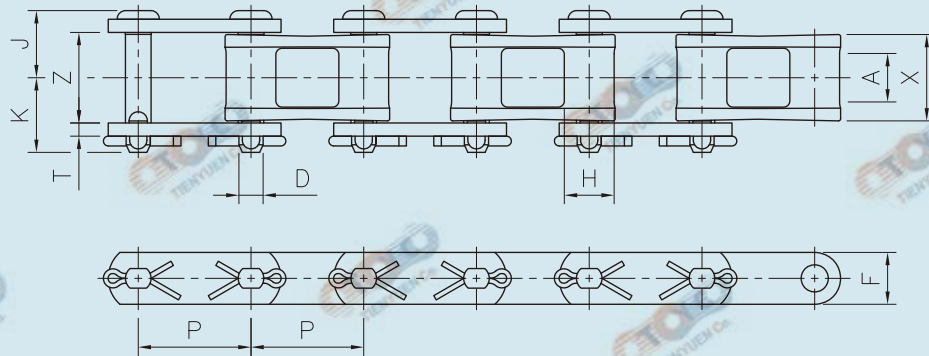

Chain No.	Pitch		Block			Pin			Outside Link			Avg. Ulti. Tensile Strength	Approx. Weight
	P		X	A	H	D	J	K	T	F	Z		
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m
C55	1.631	41.43	31.75	17.53	18.29	9.53	24.64	27.43	4.83	19.05	33.27	5,550	3.25
C77	2.308	58.62	31.75	17.53	18.29	11.11	25.35	29.55	4.83	22.35	33.27	6,800	3.45
C188	2.609	66.27	40.60	23.88	22.35	12.70	31.75	35.05	6.35	28.45	41.15	8,600	5.35
C102B	4.000	101.60	74.20	48.80	24.90	15.88	52.35	57.90	9.50	38.10	74.70	14,700	10.13
C111	4.760	120.90	86.90	61.50	36.60	19.05	60.45	69.10	9.50	44.45	87.40	22,000	14.00
C132	6.050	153.67	111.30	77.20	44.20	25.40	77.75	85.85	12.70	50.80	111.80	30,600	19.96

1. Block link to be supplied with CLASS P - pearlitic malleable iron
2. Available in both cottered and riveted style
3. Roof-top attachments for size C55 are available upon request

ANSI STEEL BUSHED CHAIN

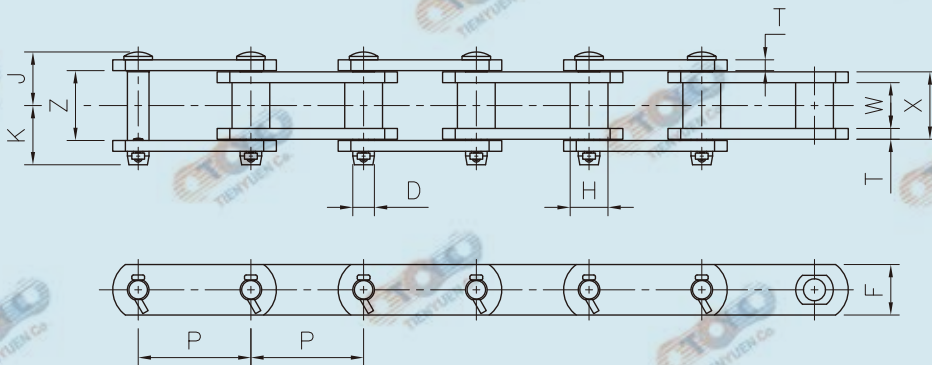

Chain No.	Pitch		Inside Link			Pin			Outside Link			Avg. Ulti. Tensile Strength	Approx. Weight
	P		X	W	H	D	J	K	T	F	Z		
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m
SS188	2.609	66.27	40.60	26.90	22.35	12.70	31.75	35.05	6.53	28.45	41.15	11,500	5.44
SS102B	4.000	101.60	74.20	54.10	24.90	15.88	52.35	57.90	9.50	38.10	74.70	18,500	10.13
SS111	4.760	120.90	86.90	66.80	36.60	19.05	60.45	69.10	9.50	50.80	87.40	23,000	14.96
SS110	6.000	152.40	74.20	54.10	32.00	15.88	52.35	57.90	9.50	38.10	74.70	18,500	9.25
SS150	6.050	153.67	111.30	84.30	44.70	25.40	77.75	85.85	12.70	63.50	111.80	45,500	24.36