


MOTORCYCLE CHAIN APPLICATIONS

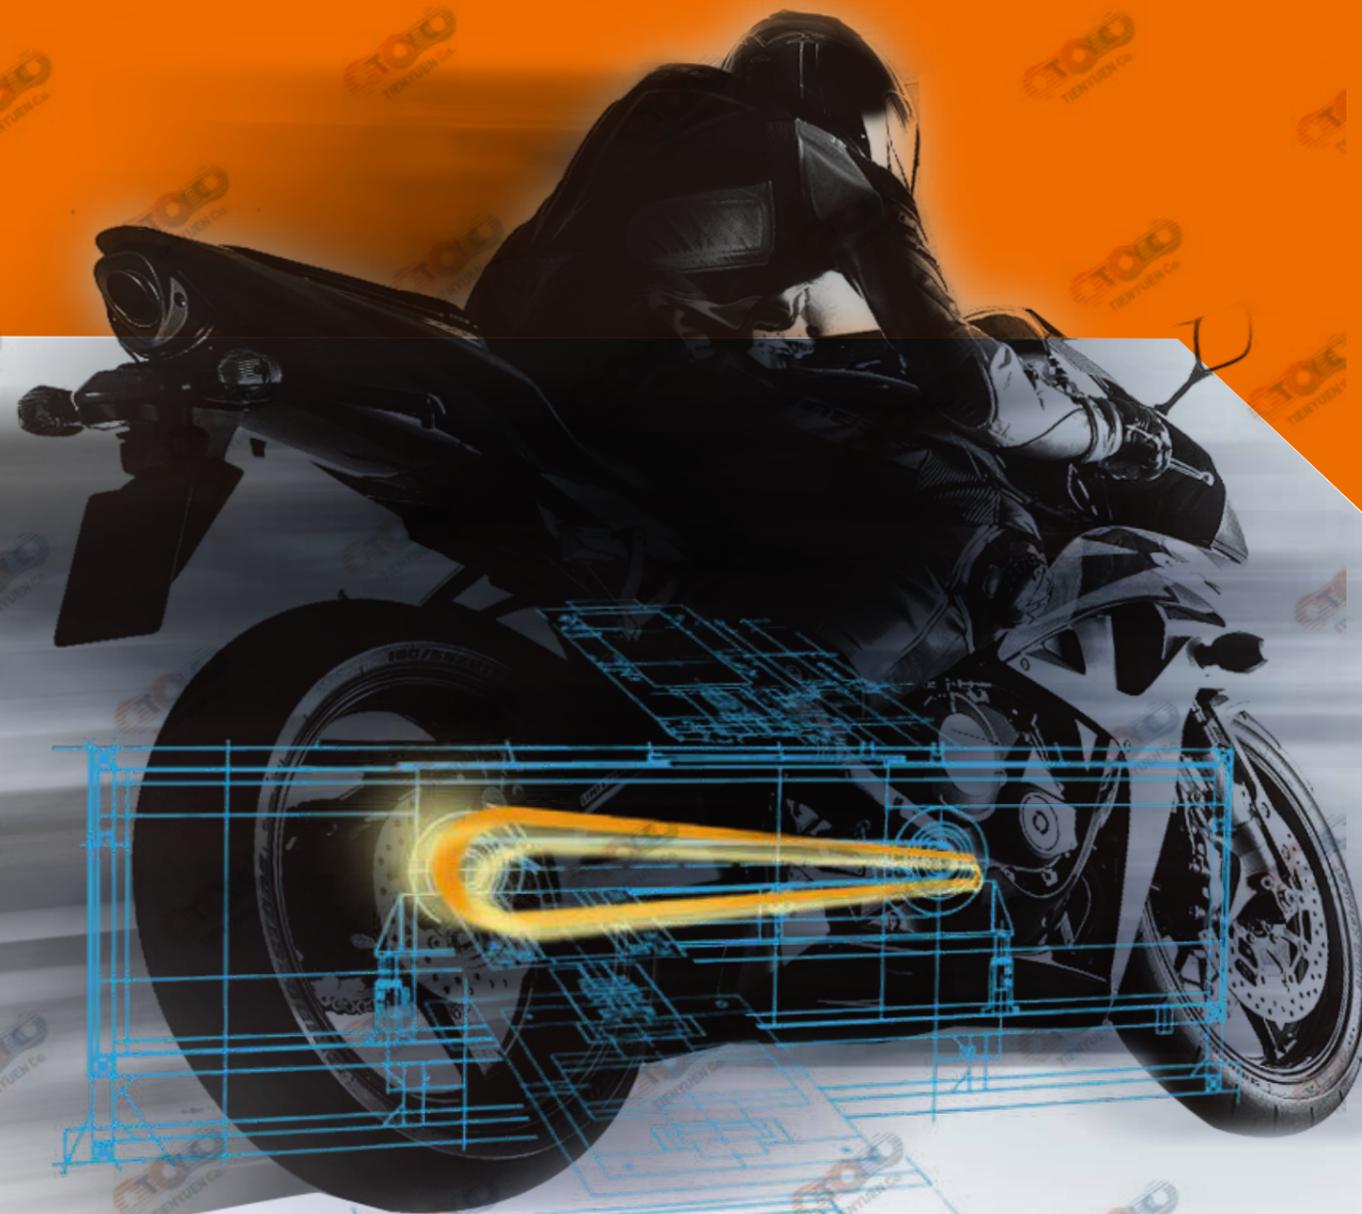

CHAIN WITH O-RING or X-RING		Application by motorcycle power (CC)									
		85	100	125	250	350	500	650	750	900	1000
428MSO (O-RING)	street/off-road										
520SO (O-RING)	street/off-road										
520HSO (O-RING)	street										
525HSO (O-RING)	street/off-road										
530HSO (O-RING)	street										
428MSX (X-RING)	street/off-road										
520SX (X-RING)	street/off-road										
520HSX (X-RING)	street										
525HSX (X-RING)	street										
530HSX (X-RING)	street										
520HUX (X-RING)	street										
525HUX (X-RING)	street										
530HUX (X-RING)	street										

MOTOCROSS CHAIN		Application by motorcycle power (CC)									
		50	65	85	100	125	200	250	350	450	500
520U											
520UX											

STANDARD AND REINFORCED CHAIN		Application by motorcycle power (CC)									
		50	65	100	125	200	250	350	450	500	
415											
420											
420H											
428											
428H											
520											
520H											
525H											
530H											

Quality is demonstrated by the most rigorous tests both on test stand and on the road