



GRIPPER CHAIN

With more than 10 years of experience in the market, our special chains for plastic film transport are widely accepted by both aftermarket users and OEMs alike. To suit different market requirements, this line is available in both ANSI and ISO base chain sizes.

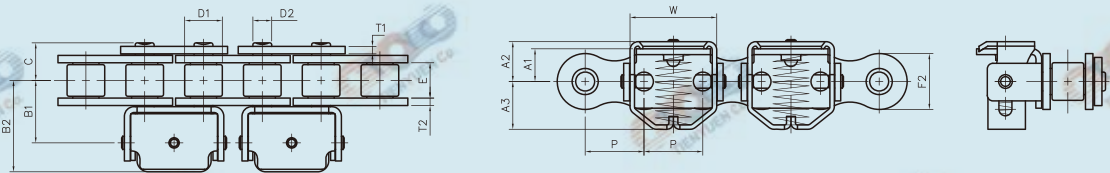


Chain No.	Pitch x Width	Roller	Pin		Link			Stainless Steel Clamp						Avg. Ult. Tensile Strength	Approx. Weight
	P x E	D1	D2	C	T1	T2	F2	B1	B2	A1	A2	A3	W		
	inch mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m
50 NP	5/8 x 3/8 15.88 x 9.53	10.16	5.09	10.15	2.01	2.01	15.08	16.80	24.65	8.83	10.75	12.95	23.40	3,100	1.56
08B NP	1/2 x 5/16 12.70 x 7.75	8.51	4.45	8.24	1.49	1.58	11.81	13.81	20.11	7.95	10.40	11.35	19.70	1,920	1.18
08B NP	1/2 x 5/16 12.70 x 7.75	8.51	4.45	8.24	1.49	1.58	11.81	13.32	19.60	7.64	9.95	6.28	20.70	1,920	1.15
10B NP	5/8 x 3/8 15.88 x 9.65	10.16	5.08	9.85	1.71	1.71	14.73	16.60	24.40	8.83	10.75	12.95	23.40	2,720	1.49

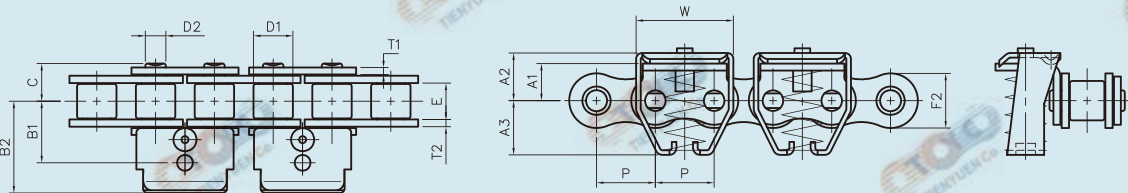


Chain No.	Pitch x Width		Roller	Pin		Link			Stainless Steel Clamp						Avg. Ulti. Tensile Strength	Approx. Weight	
	P x E			D1	D2	C	T1	T2	F2	B1	B2	A1	A2	A3			W
	inch	mm		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			mm
08B NP	1/2 x 5/16	12.70 x 7.75	8.51	4.45	8.24	1.49	1.58	11.81	13.30	19.80	8.00	10.3	11.7	21.00	1,920	1.15	


GRIPPER CHAIN

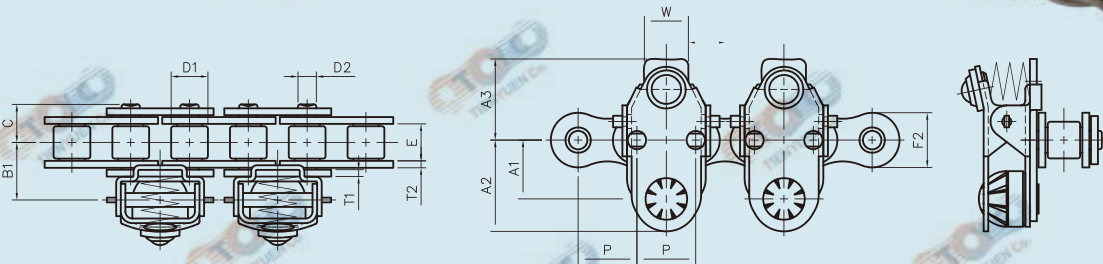

Chain No.	Pitch x Width		Roller	Pin		Link			Stainless Steel Clamp					Avg. Ulti. Tensile Strength	Approx. Weight
	P x E		D1	D2	C	T1	T2	F2	B1	A1	A2	A3	W		
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m
40 PHSS	1/2 x 5/16	12.70 x 7.92	7.92	3.98	8.22	1.49	1.49	12.06	12.0	12.7	19.7	17.5	9.5	1,450	1.36

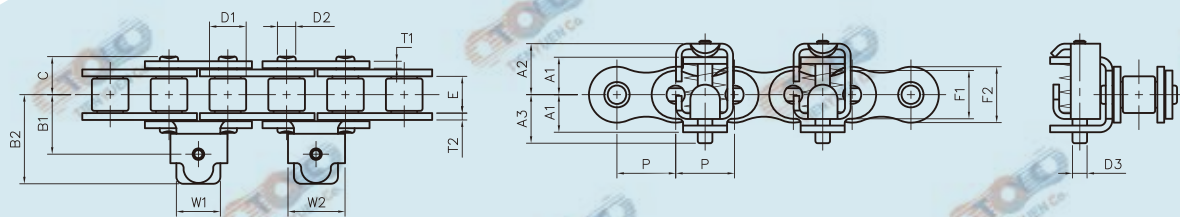

Chain No.	Pitch x Width	Roller	Pin			Link				Stainless Steel Clamp								Avg. Ult. Tensile Strength	Approx. Weight
	P x E	D1	D2	C	T1	T2	F1	F2	B1	B2	A1	A2	A3	W1	W2	D3			
	inch mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg/m	
40 PHSS	1/2 x 5/16 12.70 x 7.92	7.92	3.98	8.22	1.49	1.49	10.41	12.06	12.8	19.2	8.1	11.0	10.5	9.5	12.3	3.2	1,450	1.36	

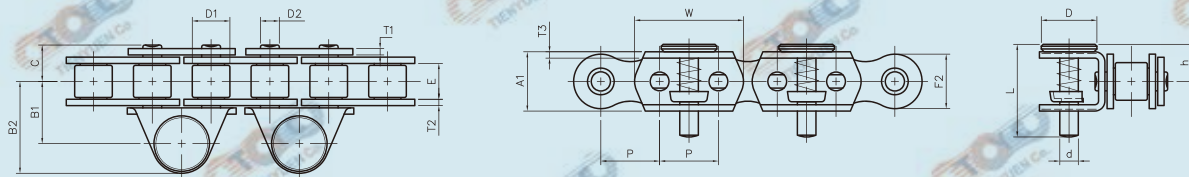

Chain No.	Pitch x Width	Roller	Pin			Link				Stainless Steel Clamp								Avg. Ulti. Tensile Strength	Approx Weight
	P x E	D1	D2	C	T1	T2	T3	F2	B1	B2	A1	W	L	D	d	h			
	inch mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m	
10B NP	5/8 x 3/8 15.88 x 9.65	10.16	5.08	9.85	1.71	1.71	1.60	14.73	16.8	24.8	16.0	29.4	25.2	13.5	5.0	10.0	2,720	1.49	