



NON-STANDARD HIGH STRENGTH ROLLER CHAIN

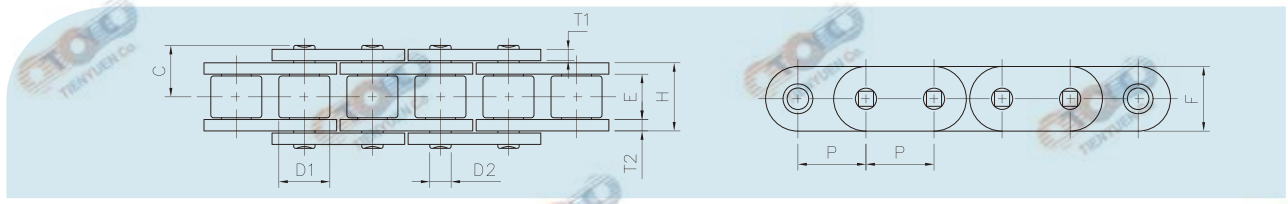


Chain No.	Pitch x Width		Roller	Pin		Link				Avg. Ulti. Tensile Strength	Approx. Weight
	P x E		D1	C	D2	T1	T2	H	F		
	inch	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m
C630HS	3/4 x 3/8	19.05 x 9.53	14.28	14.25	7.11	3.4	4.2	19.40	19.10	7,600	2.62
C70HS	7/8 x 9/16	22.23 x 14.29	15.60	18.15	7.94	4.0	4.8	24.25	22.60	10,500	3.57

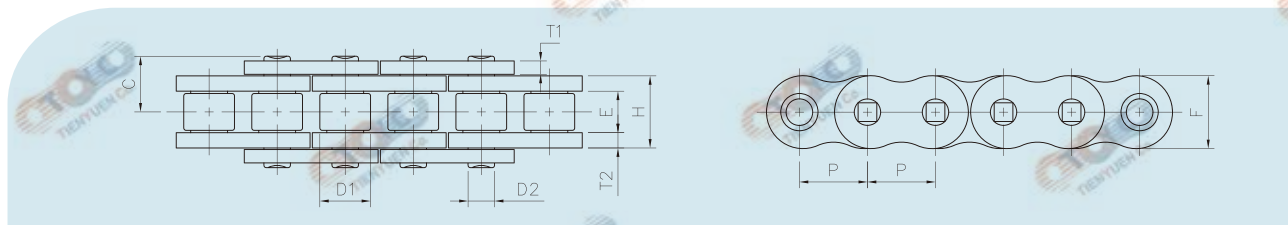

Chain No.	Pitch x Width		Roller	Pin		Link				Avg. Ulti. Tensile Strength	Approx. Weight
	P x E		D1	C	D2	T1	T2	H	F		
	inch	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m
80HHA	1 x 5/8	25.40 x 15.88	17.80	21.00	9.54	4.8	5.6	27.54	26.60	14,000	4.83
85HHA*	1 x 5/8	25.40 x 15.88	15.88*	21.40	9.54	4.8	5.6	27.54	26.60	14,000	4.56
90H	1-1/8 x 11/16	28.58 x 17.46	21.30	23.80	11.11	5.6	6.4	30.81	30.60	19,000	6.57

*85HHA is rollerless. Dimension 'D1' is bush diameter

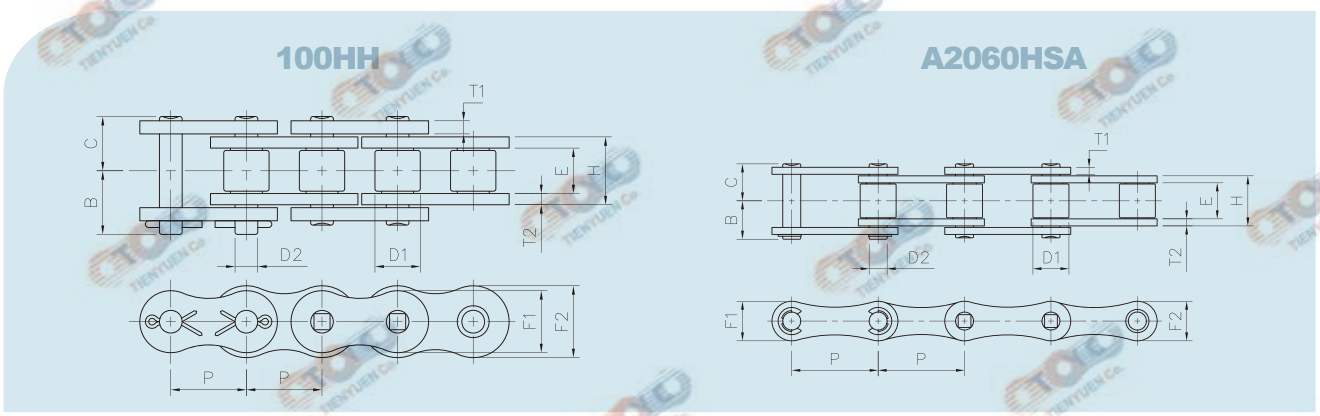

Chain No.	Pitch x Width		Roller	Pin			Link					Avg. Ulti. Tensile Strength	Approx. Weight
	P x E		D1	C	B	D2	T1	T2	H	F1	F2		
	inch	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgf	kg / m
100HH	1-1/4 x 3/4	31.75 x 19.05	19.05	22.79	26.69	9.54	5.6	4.8	29.00	26.03	30.16	13,500	4.72
A2060HSA	1-1/2 x 5/8	38.10 x 15.88	15.88	16.30	16.90	7.94	3.2	3.2	22.60	17.45	17.45	4,600	1.60