


TOP ROLLER CHAIN

Usually used in transfer systems, TYC top roller chains are available with steel or plastic top rollers.

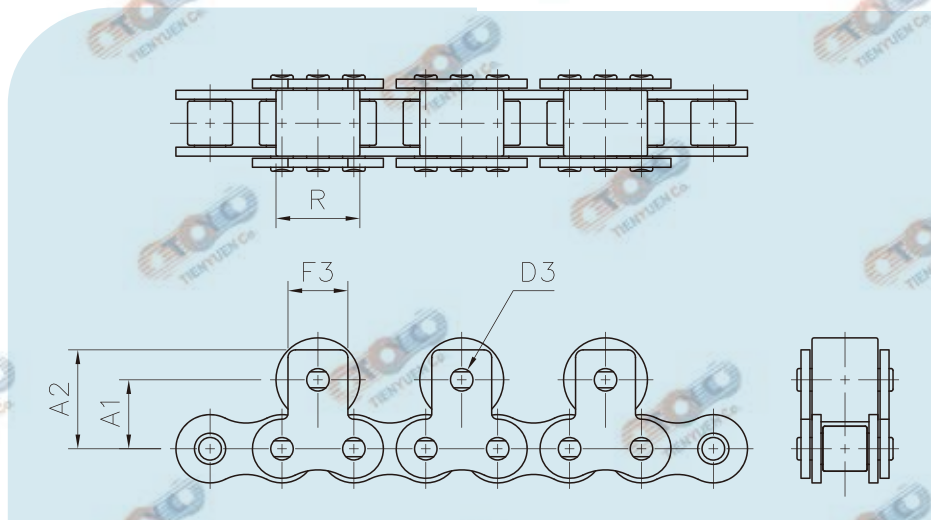


Chain No.	Top Roller				Top Roller Diameter R		Approx. Weight EL*
	A1	A2	D3	F3	EL*	E2L**	
	mm	mm	mm	mm	mm	mm	
60	18.26	26.19	5.96	15.88	18.00	22.23	3.60
80	24.61	34.05	7.94	19.05	24.00	28.58	6.09
100	31.80	44.50	9.54	25.40	30.00	39.67	9.30

Base chain dimensions follow ANSI standard roller chains

* Every link

** Every 2nd link

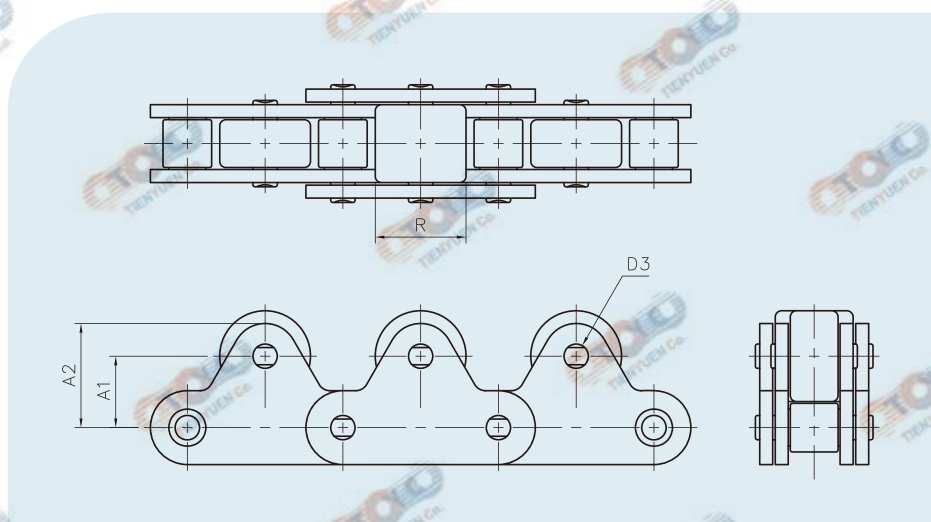

Chain No.		Top Roller				Approx. Weight	
		A1	A2	D3	R	STD ROLLER*	LARGE ROLLER*
		mm	mm	mm	mm	kg / m	
C2060H	C2062H	17.50	25.50	5.96	22.23	3.15	4.36
		25.42	33.42			3.74	4.46
C2080H	C2082H	29.00	40.50	11.11	28.58	5.64	6.76
C2100H	C2102H	35.40	49.70	14.29	39.67	9.11	11.37

Base chain dimensions follow ANSI standard double pitch roller chains

*Base chain roller style