


BLOCK CHAIN




Used in light-load, low-speed conveyors, TYC block chains are available in either solid blocks made of powdered metal or laminated blocks made of steel plates. Stainless Steel laminated block chains are also available.

BLOCK TYPE

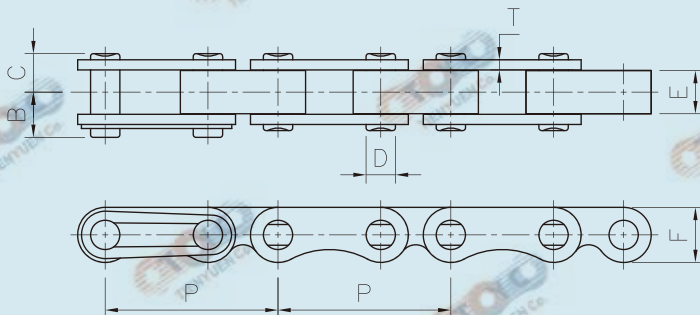

Chain No.	Pitch x Width		Pin			Link		Avg. Ulti. Tensile Strength	Approx. Weight
	P x E		C	B	D	T	F		
	inch	mm	mm	mm	mm	mm	mm		
B502	1 x 3/16	25.40 x 4.76	4.80	5.80	4.31	1.49	8.25	600	0.31
B503	1 x 1/4	25.40 x 6.35	5.65	6.65	4.31	1.49	8.25	700	0.37
B504	1 x 5/16	25.40 x 7.94	7.08	8.12	4.75	2.00	8.25	700	0.46
B505	1 x 3/8	25.40 x 9.53	7.90	8.90	4.75	2.00	8.25	900	0.52
B506	1 x 1/2	25.40 x 12.70	9.48	10.47	4.75	2.00	8.25	900	0.62

LAMINATED TYPE

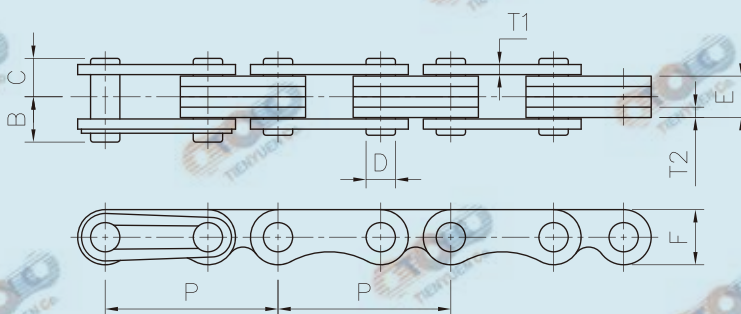

Chain No.	Pitch x Width		Pin			Link		Avg. Ulti. Tensile Strength	Approx. Weight
	P x E		C	B	D	T1 / T2	F		
	inch	mm							
L502	1 x 3/16	25.40 x 4.76	4.80	5.80	4.31	1.49 / 1.52	8.25	1,100	0.33
L503	1 x 1/4	25.40 x 6.35	5.65	6.65	4.31	1.49 / 1.52	8.25	1,100	0.37
L504	1 x 5/16	25.40 x 7.94	7.08	8.12	4.75	2.00 / 1.52	8.25	1,500	0.50
L505	1 x 3/8	25.40 x 9.53	7.90	8.90	4.75	2.00 / 1.52	8.25	1,500	0.55
L506	1 x 1/2	25.40 x 12.70	9.48	10.47	4.75	2.00 / 1.52	8.25	1,500	0.71

Laminated type is available in stainless steel